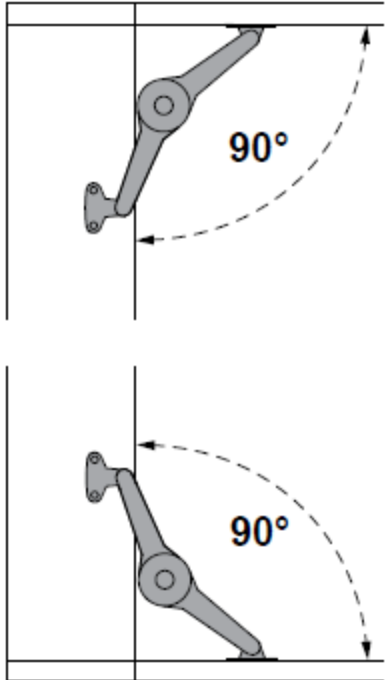
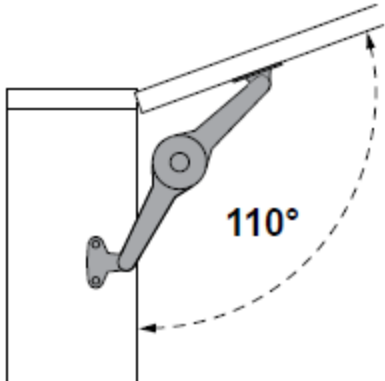


כמות מנגנונים	סגירה רכה (ק"ג)	החזקת חזית (ק"ג)	גובה חזית (מ"מ)	
x1	≤15.0	≤14.0	200	
x2	≤15.0	≤15.0		
x1	≤15.0	≤11.5	250	
x2	≤15.0	≤15.0		
x1	≤12.0	≤9.0	300	
x2	≤15.0	≤15.0		
x1	≤11.0	≤8.0	350	
x2	≤15.0	≤15.0		
x1	≤9.0	≤7.0	400	
x2	≤15.0	≤14.0		
x1	≤8.0	≤6.0	450	
x2	≤15.0	≤12.0		
x1	≤7.0	≤5.5	500	
x2	≤15.0	≤11.0		
x1	≤6.5	≤5.0	550	
x2	≤13.0	≤10.0		
x1	≤6.0	≤5.0	600	
x2	≤12.0	≤9.5		
x1	≤5.5	≤4.0	650	
x2	≤11.0	≤8.5		
x1	≤5.0	≤4.0	700	
x2	≤10.5	≤8.0		

x1	≤15.0	≤12.5	200	
x2	≤15.0	≤15.0		
x1	≤12.0	≤9.5	250	
x2	≤15.0	≤15.0		
x1	≤10.0	≤8.0	300	
x2	≤15.0	≤15.0		
x1	≤9.0	≤7.0	350	
x2	≤15.0	≤13.5		
x1	≤8.0	≤6.0	400	
x2	≤15.0	≤12.0		
x1	≤7.0	≤5.0	450	
x2	≤14.0	≤11.0		
x1	≤6.0	≤5.0	500	
x2	≤12.0	≤9.5		
x1	≤5.5	≤4.0	550	
x2	≤11.0	≤8.5		
x1	≤5.0	≤4.0	600	
x2	≤10.0	≤8.0		
x1	≤5.0	≤3.5	650	
x2	≤9.5	≤7.0		
x1	≤4.0	≤3.0	700	
x2	≤9.0	≤7.0		

x1	≤12.5	≤9.5	200	
x2	≤15.0	≤15.0		
x1	≤10.0	≤7.5	250	
x2	≤15.0	≤15.0		
x1	≤8.0	≤6.5	300	
x2	≤15.0	≤12.5		
x1	≤7.0	≤5.5	350	
x2	≤14.0	≤11.0		
x1	≤6.0	≤4.0	400	
x2	≤12.5	≤9.5		
x1	≤5.5	≤4.0	450	
x2	≤11.0	≤8.5		
x1	≤5.0	≤4.0	500	
x2	≤10.0	≤7.5		
x1	≤4.0	≤3.5	550	
x2	≤9.0	≤7.0		
x1	≤4.0	≤3.0	600	
x2	≤8.0	≤6.0		
x1	≤4.0	≤3.0	650	
x2	≤7.5	≤5.5		
x1	≤3.5	≤3.0	700	
x2	≤7.0	≤5.0		